

Aritco 7000 - our bestselling platform lift



Aritco 7000

The lift is designed to meet all requirements for quality, safety and service life. It is a perfect fit for tough and demanding environments such as schools, shops and residential buildings.

Several advantages offered by Aritco 7000:

- Design, sizes and options tailored for public environments
- 95% recyclable materials
- 'A' rated energy consumption according to VDI4707
- Patented screw/nut technology (no oil that can leak)
- The lowest maintenance and operating costs on the market

For more information visit aritcoplatformlifts.com/7000



ARITCO (THAILAND) CO., LTD.
467/2 Rama 3 Charoenrat Rd., Bang Khlo
Bang Kho Laem, Bangkok 10120, Thailand
Tel: 02 - 408 - 0200
Fax: 02 - 638 - 8877

Email: Sales@aritco.co.th

Website: www.aritco.co.th • [Facebook.com/aritco.co.th](https://www.facebook.com/aritco.co.th)

Aritco 7000

LIFT COLOUR

Can be painted in any RAL colour from the RAL Classic chart.



GLASS

4 different glass types to choose from.




FLOOR


9 different floorings to choose from.

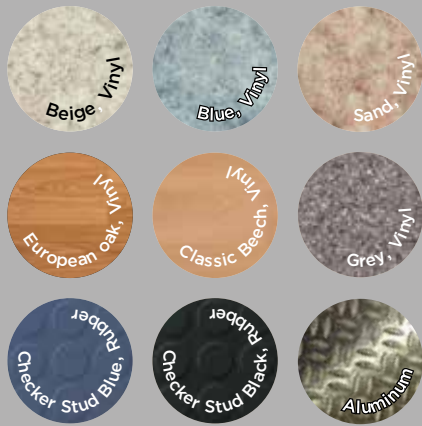


Size: 900 x 1040 mm
Rated load: 250 kg / 2 pers.
Wheelchair: -

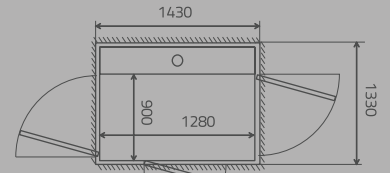


Size: 900 x 1280 mm
Rated load: 410 kg / 5 pers.
Wheelchair: Lone user or type A*

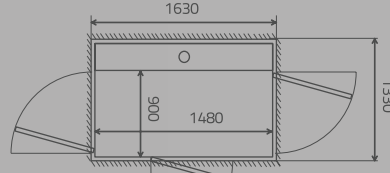


Size: 900 x 1480 mm
Rated load: 410, 500 kg / 5, 6 pers.
Wheelchair: A or B with attendant*

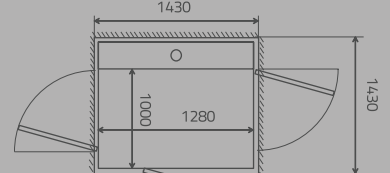

Size: 1000 x 1280 mm
Rated load: 410 kg / 5 pers.
Wheelchair: Lone user or type A*

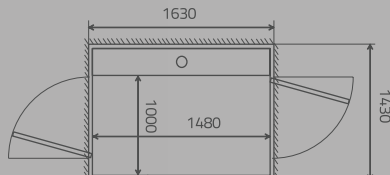

Size: 1000 x 1480 mm
Rated load: 410, 500 kg / 5, 6 pers.
Wheelchair: A or B with attendant*

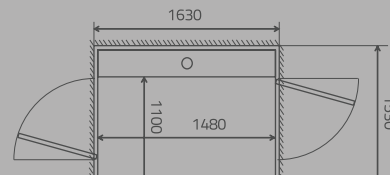

Size: 1100 x 1480 mm
Rated load: 410, 500 kg / 5, 6 pers.
Wheelchair: A or B with attendant, adjacent entry*









Size: 1000 x 1980 mm
Rated load: 500 kg / 6 pers.
Wheelchair: A or B with attendant*



Size: 1100 x 1580 mm
Rated load: 500 kg / 6 pers.
Wheelchair: A or B with attendant, adjacent entry*

* National guidelines may apply.
 Wheelchair Type A and B according to EN 12183/EN 12184.

Product summary

<p>TOP HEIGHT</p> <p>Minimum 1100 mm</p>	<p>TYPE OF LIFT</p> <p>Platform lift intended for installation in public environments.</p>	<p></p> <p>RATED SPEED</p> <p>Max. 0,15 m/s</p>	<p></p> <p>DRIVE SYSTEM</p> <p>Patented screw and nut system 2.2 kW motor</p>	<p>CONTROL FROM CARRIER CONTROL PANEL</p> <p>Hold to run - press and hold For installations outside Europe One touch operation (press one time)</p>	<p>NUMBER OF FLOORS</p> <p></p> <p>2 to 6 floors</p>
<p></p> <p>INSTALLATION</p> <p>Recessed installation 50 mm below floor Installed directly on floor with 50 mm ramp</p> <p>Control voltage 24V</p>	<p>OUTDOOR</p> <p>INDOOR</p>	<p>TRAVEL HEIGHT</p> <p>250-13 000 millimeter</p>		<p></p> <p>WARRANTY</p> <p>Aritco 7000 comes with a 24 months warranty. The screw and nut assembly has a 10 year warranty.</p>	<p></p> <p>TECHNICAL COMPLIANCE</p> <p>European Machine directive 2006/42/EC European standard EN 81-41</p>

Emergency lowering : Battery-powered